


SPECIFICATION

- 1.Rated Voltage 5VDC
- 2.Operating Voltage 3~8VDC
- 3.Max.Rated Current 30mA/5VDC
- 4.Min.Sound Pressure Level 85dB/10cm
- 5.Resonant Frequency 2300±300Hz
- 6.Response Time 50ms
- 6.Case Material PBT
- 7.Operating Temperature -20~+85℃
- 8.Store Temperature -20~+88℃
- 9.Weight 2g

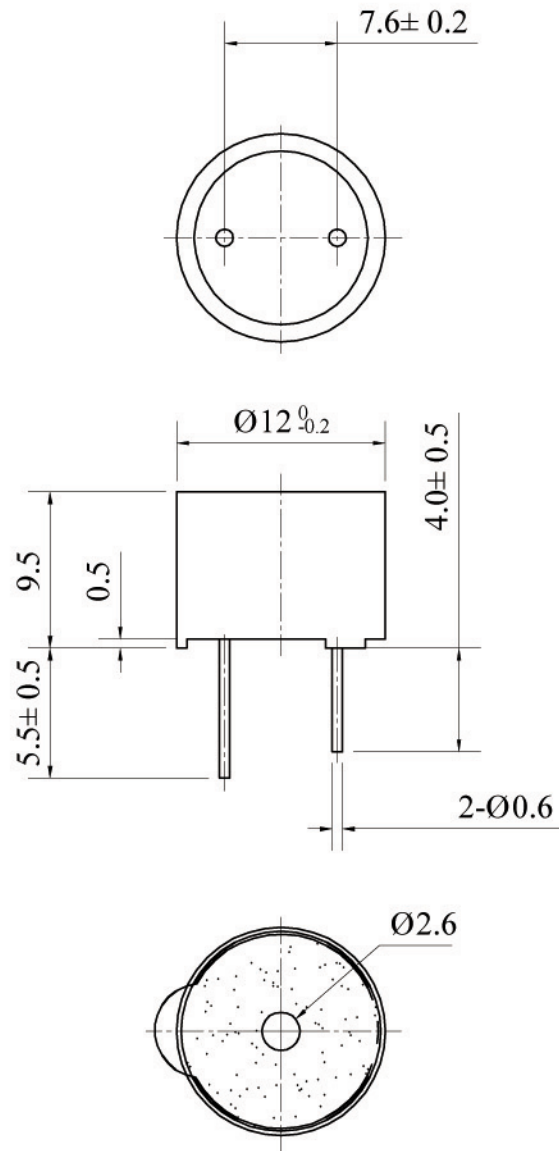

NINGBO BEST GROUP CO., LTD.

FBMB1295A3

UNIT	DWG NO.		
mm			
SCALE	NOT TO SCALE	SHEET	VER 1.0